


SVP250 DC CONTACTOR

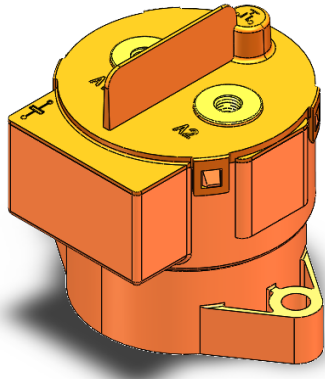


FEATURES:

- Ceramic brazing sealed technology guarantees no risk of arc leaking and ensures no fire or explosion;
- Filled with gas (mostly hydrogen) to effectively prevent the oxidation burnt, the contact resistance is low and stable, and contact part can meet IP67 protection level;
- Carrying current 250A continuously at 85°C;
- Reinforced insulation, Insulation resistance is 1000MΩ / 1000VDC, and dielectric strength between the coil and contacts is 3.5KV

COIL SPECIFICATION

NOMINAL VOLTAGE		MAX.STARTING CURRENT (A)	MAX. IMPACT TIME (m s)	NOMINAL OPERATING CURRENT (A)	PULL-IN VOLTAGE (V)	DROP-OUT VOLTAGE (V)	COIL POWER (W)	MAX. ALLOWABLE VOLTAGE (V)
ITEM								
DC	9-36	3.6A	120ms	0.13A@12VDC 0.07A@24VDC	≤9VDC	≥3VDC	43.2W (0.12s) Keep 1.7W	36VDC

PART NUMBERING RULE

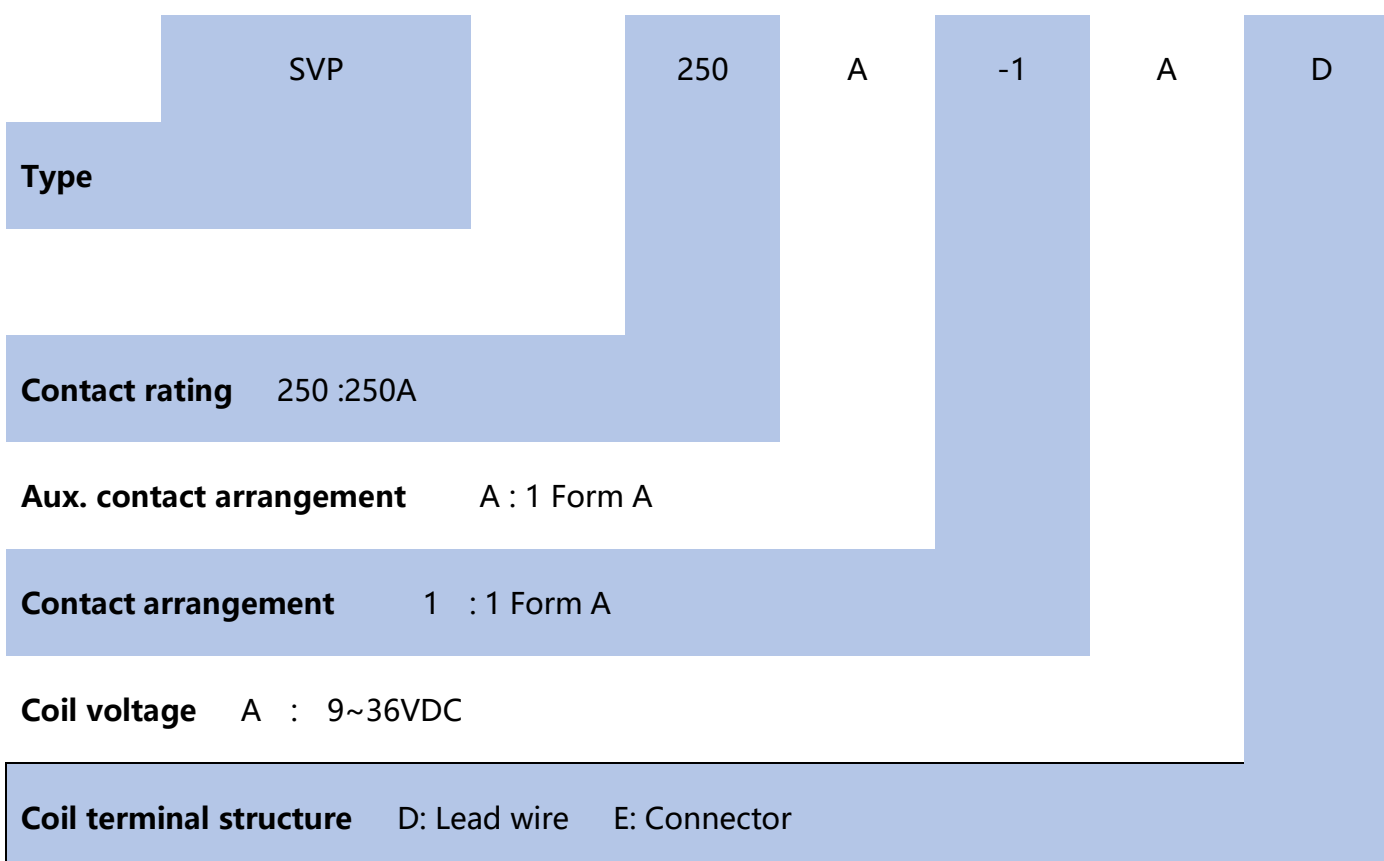

CONTACT RATINGS

ITEM MODEL	Unipolar resistive load	
	SVP250	
Maximum Continuous Current	250A	
Maximum Cut Off	V	1000 VDC
	A	2500A (280 VDC) 1 Ops
Overload cut off	350A 750VDC 10 Ops	
Min. Switching Capacity (Resistive Load)	1A 12VDC	
Short Term Current	320A 10min, 500A 10s, 2000A 1s	
Contact Resistance	≤0.4mΩ (DC250A)	
Contact Material	Alloy Cu	
Contact Arrangement	1A (SPST-NO.)	
General Auxiliary Contacts Current Range	2A 30VDC	
General Minimum Current Auxiliary Contacts	100mA 8VDC	



INSULATION PERFORMANCE

Insulation Resistance		Min.1000MΩ 1000V DC
Dielectric Strength	Between Open Contacts	3500V AC 60 Sec.1mA
	Between Contact And Coil	3500V AC 60 Sec.1mA
Operate Time (at 20 °C)		≤30ms
Release Time (at 20 °C)		≤10ms




MECHANICAL PARAMETERS

Life	Mechanical Life		2 x 10 ⁵ Ops
	Electrical Life (Resistive Load)	450 VDC 250 A	6,000 Ops
		800 VDC 250 A	1,000 Ops
		1000 VDC 250 A	500 Ops
Shock Resistance	Functional		Min 196 m/s ² [20G] 11ms , (10 μs)
	Destructive		Min 490 m/s ² [50G] 6ms
Vibration Resistance	Functional		49 m/s ² [5G] 10 to 500Hz , (10 μs)
	Destructive		49 m/s ² [5G] 10 to 500Hz 4h
Conditions For Operation, Transport And Storage	Ambient Temperature		-40°C to +85°C
	Humidity		5% to 85% R.H.
Weight			≈380g

ENGINEERING DATA

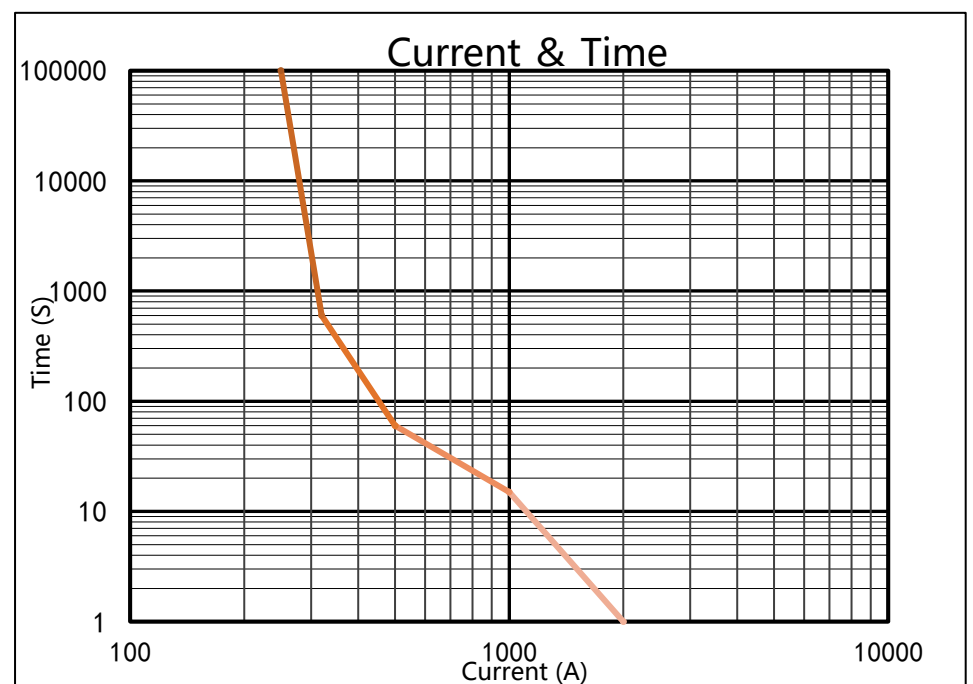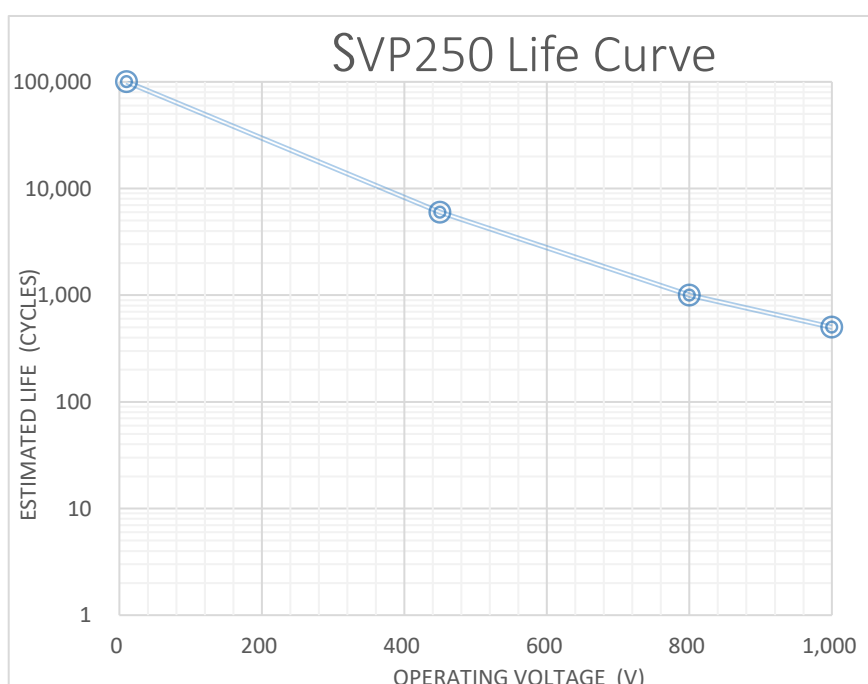


DIMENSIONAL DRAWING

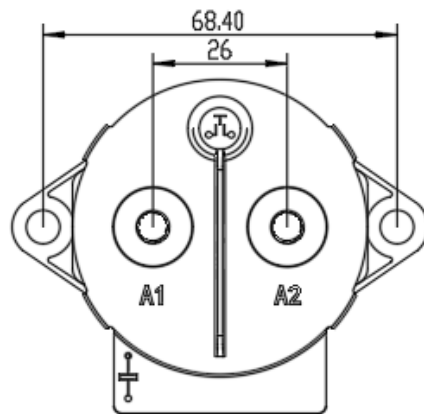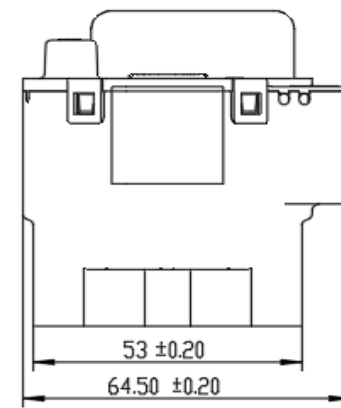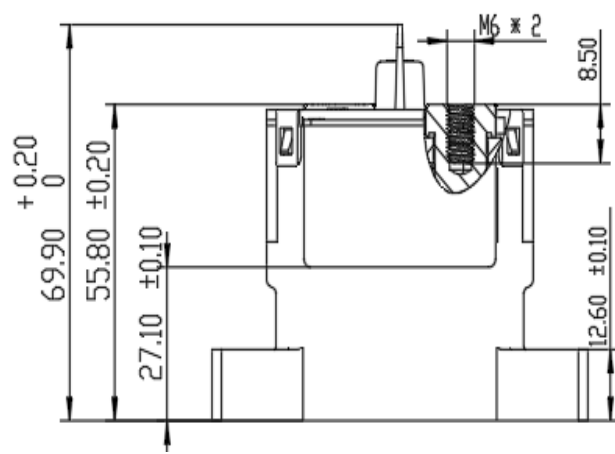


1. Coil wire: UL10267 AWG22, length 320mm±20mm, red: positive, black: negative
2. Auxiliary contact wire: UL10267 AWG22, length 320mm±20mm, black;
3. Main contact non-polarity;

MOUNTING DIMENSIONS

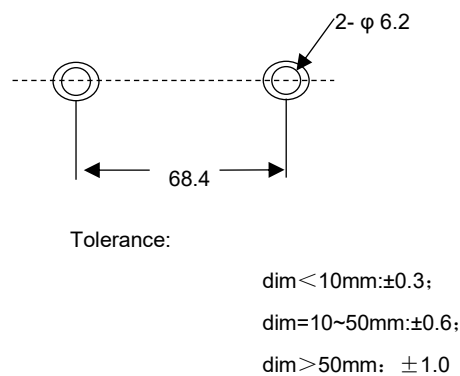

SCHEMATIC

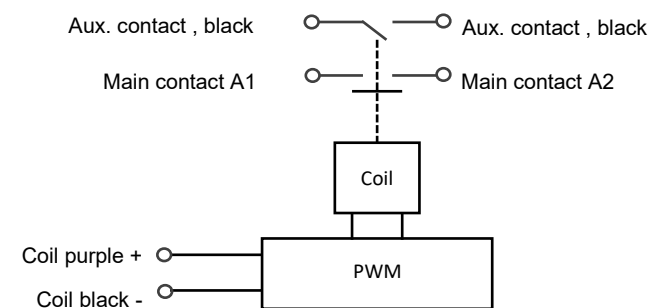

CONTACTOR APPLICATION PRECAUTIONS

SV series high voltage DC contactor with higher arc cooling capacity hydrogen medium, have the ability of DC high voltage cutting and adopt ceramic sealing explosion-proof structure. Contact part have waterproof, anti oxidation and other functions.

It can be widely used in electric vehicles, hybrid vehicles, fuel cell vehicles, construction machinery, photovoltaic power generation, wind power generation, battery charging and discharging system, DC voltage power control and other DC high voltage fields.

Notes:

1. All types of contactor terminals have polarity difference. Please use correctly according to the mark on each surface of the product. When the connection polarity is reversed, the electrical characteristics promised in the specification will not be guaranteed.
2. The rated value of contact parameters are the value of resistive load. Without measures, there may be a decline in electrical life and the occurrence of cut off. If using diodes, it may lead to a decline in cutting performance
3. During the action voltage test of double coil contactor, voltage can not be risen slowly. Please drive the product coil through the fast rising (step type power supply mode), otherwise the contactor will not act.
4. Don't put the contactor in the environment that over normal operating temperature (-40 degrees C to 85 C) for a long time.
5. Please avoid installing near in strong magnetic field (around transformer and magnet) and hot objects.

6. Make sure the main power line is closest to the contactor leading-out terminal, then installed tightly according to the order of the flat washer, spring washer and nut. Incorrect connection order may cause serious overheating, and lead to the insulation layer melting of connecting cable.

7. Screw locking torque of every part should be accordant with following chart in case of breakage.

➤ **Part I Leading-out terminal installation:**

CREWS MODEL	SVC050	SVC/P150	SVC300	SVC600
	SVC100	SVC/P200	SVC350	/
	SVC135	SVC/P250	SVC400	/
	/	SVC/P300	SVC500	/
M5	6N.m~8N.m	/	/	/
M6	/	10N.m~12N.m	10N.m~12N.m	/
M8	/	10N.m~12N.m	10N.m~12N.m	/
M12	/	/	/	10N.m~12N.m

Remarks: SVC050、SVC100、SVC135 use screws M5x10.

➤ **Part II contactor installation:**

CREWS MODEL	SVC050	SVC/P150	SVC300	SVC600
	SVC100	SVC/P200	SVC350	/
	SVC135	SVC/P250	SVC400	/
	/	SVC/P300	SVC500	/
M4	3N.m~4N.m	/	/	/
M5	/	6N.m~8N.m	6N.m~8N.m	6N.m~8N.m
M6	/	10N.m~12N.m	/	/

Remarks:

a. Screw strength must be in compliance with the requirements of grade 8.8 or above (GB/T70.1)

b. The effective locking thread length must be greater than 5mm.

8.Packing specification

Each box MODEL	SVC050	SVC/P150	SVC300	SVC600
	SVC100	SVC/P200	SVC350	/
	SVC135	SVC/P250	SVC400	/
	/	SVC/P300	SVC500	/
Specifications (D*W*H)	412*407*146 mm	382*302*196 mm	382*302*196 mm	382*302*196 mm
Number	60 PCS	24 PCS	24 PCS	12PCS
Net weight	10.8 kg	9.12 kg	13.2 kg	10.8 kg
Monomer	0.18 kg	0.38 kg	0.55 kg	0.90 kg

Remarks: there is a shockproof bubble bag in the packing box, and there is shockproof foam inside the box.

9.Please avoid adhering grease and other foreign material on the leading-out terminal;

Please use the following specifications of the connection wire, otherwise it may cause abnormal heat of the terminal part.

MODEL	SVC050	SVC100	SVC135	SVC/P150	SVC/P200	SVC/P250	SVC/P300	SVC350	SVC500
								SVC400	SVC600
Area (mm ²)	16	35	50	70	95	150	185	240	185*2

10. In the case of accidental fall of the contactor, see intended not to use.

11. Attentions and product technical data should be updated termly, and copyright by Ebusbar all.